

KYNAR® 710

Kynar® resins are fluorinated thermoplastic homopolymers.

Outstanding characteristics: chemical resistance, imperviousness to UV, high barrier properties, high purity, good mechanical and thermo-mechanical properties.

Kynar® 710 resin is a grade of granules for injection molding, rotomolding applications and multifilament extrusion. This product is **NSF/ANSI/CAN 61** certified.

A powder form is available as **Kynar® 711 resin**.

PROPERTIES	VALUE	UNIT	TEST STANDARD
RHEOLOGICAL PROPERTIES			
Melt Volume-Flow Rate	20	cm ³ /10 min	ISO 1133
Temperature	230	°C	-
	446	°F	-
Load	5	kg	-
	11	lb	-
Melt Flow Rate	19 - 35	g/10min	ASTM D1238
Temperature	230	°C	-
Load	3.8	kg	-
Molding Shrinkage, parallel	2.0	%	ISO 294-4, 2577
Molding Shrinkage, normal	2.0	%	ISO 294-4, 2577
Melt Viscosity, 230°C, 100 s ⁻¹	4 - 8	kPoise	ASTM D3835
MECHANICAL PROPERTIES			
Tensile Modulus	2300	MPa	ISO 527-1/-2
	334000	psi	
Tensile Modulus, 73 °F	1380 - 2310	MPa	ASTM D638
	200000 - 335000	psi	
Yield Stress	54	MPa	ISO 527-1/-2
	7830	psi	
Tensile Strength at Yield, 73 °F	44.8 - 55.2	MPa	ASTM D638
	6500 - 8000	psi	
Yield Strain	9	%	ISO 527-1/-2
Elongation at Yield, 73 °F	5 - 10	%	ASTM D638
Nominal Strain at Break	>50	%	ISO 527-1/-2
Tensile Strength at Break, 73 °F	34.5 - 55.2	MPa	ASTM D638
	5000 - 8000	psi	

Arkema France - A French "société anonyme", registered in the Nanterre (France) Trade and Companies Register under the number 319 632 790 SDC/11-2018
Source: automatically generated TDS from Material Database on 12-08-2024

KYNAR®

710

Elongation at Break, 73 °F	20 - 100	%	ASTM D638
Taber Abrasion, CS 17 1000g:pad	5 - 9	mg/1000 cycles	ASTM-G195-13A
Hardness, Shore D, 73 °F	76 - 80	-	ASTM D2240
Flexural Modulus, 73 °F	1380 - 2310 200000 - 335000	MPa psi	ASTM D790
Flexural Strength @ 5% Strain, 73 °F	58.6 - 75.8 8500 - 11000	MPa psi	ASTM D790
Compressive Strength, 73 °F	68.9 - 103 10000 - 15000	MPa psi	ASTM D695
Charpy Impact Strength, +23°C	192 91.3	kJ/m² ftlb/in²	ISO 179/1eU
Charpy Impact Strength, -30°C	208 98.9	kJ/m² ftlb/in²	ISO 179/1eU
Charpy Notched Impact Strength, +23°C	8 3.81	kJ/m² ftlb/in²	ISO 179/1eA
Charpy Notched Impact Strength, -30°C	5 2.38	kJ/m² ftlb/in²	ISO 179/1eA
Unnotched Impact Strength, 73 °F	1.07 - 4.27 20 - 80	kJ/m ftlb/in	ASTM D256
Notched Impact Strength, 73 °F	0.0801 - 0.214 1.5 - 4	kJ/m ftlb/in	ASTM D256
Coefficient of Friction, Static vs. Steel, 73 °F	0.2	-	ASTM D1894
Coefficient of Friction, Dynamic vs. Steel, 73 °F	0.14	-	ASTM D1894
THERMAL PROPERTIES			
Melting Temperature, 10°C/min	168	°C	ISO 11357-1/-3
Melting Point	165 - 172	°C	ASTM D3418
Glass Transition Temperature, 10°C/min	-40	°C	ISO 11357-1/-2
Glass Transition Temperature (Tg)	-40.6 - -38.3 -41 - -37	°C °F	ASTM D7028
Temperature Rating	150 302	°C °F	UL RTI
Temp. of Deflection Under Load, 1.80 MPa	110 230	°C °F	ISO 75-1/-2
Heat Deflection Temperature, 264 Psi, 248 °F/hr	105 - 115 221 - 239	°C °F	ASTM D648

Arkema France - A French "société anonyme", registered in the Nanterre (France) Trade and Companies Register under the number 319 632 790 SDC/11-2018
Source: automatically generated TDS from Material Database on 12-08-2024

KYNAR®

710

Temp. of Deflection Under Load, 0.45 MPa	130	°C	ISO 75-1/-2
	266	°F	
Heat Deflection Temperature, 66 Psi, 248 °F/hr	125 - 140	°C	ASTM D648
	257 - 284	°F	
Vicat Softening Temperature, 50°C/h 50N	140	°C	ISO 306
	284	°F	
Coeff. of Linear Thermal Expansion, parallel	150	E-6/K	ISO 11359-1/-2
Coefficient of Thermal Expansion, 73 °F	11.9 - 14.4	10E-5/°C	ASTM D696
	6.6 - 8	10E-5/°F	
Burning Behav. at 1.5 mm Nominal Thickness	V-0	class	IEC 60695-11-10
Thickness Tested	1.6	mm	-
	0.0630	in	
Yellow Card available	yes	-	-
Burning Behav. at Thickness h	V-0	class	IEC 60695-11-10
Thickness Tested	0.8	mm	-
	0.0315	in	
Oxygen Index	43	%	ISO 4589-1/-2
Limiting Oxygen Index	44	%	ASTM D2863
Thermal Conductivity	0.17 - 0.19	W/(m K)	ASTM D433
	1.18 - 1.32	BTU in / (hr ft ² K)	
Specific Heat	665 - 958	J/(kg K)	DSC
	0.25 - 0.36	BTU/(lb °F)	
Thermal Decomposition TGA, in air	375	°C	1% wt. loss
	707	°F	
Thermal Decomposition TGA, in nitrogen	410	°C	1% wt. loss
	770	°F	
Relative Thermal Index, Mechanical	150	°C	UL 746B
	302	°F	
Relative Thermal Index, Electrical	150	°C	UL 746B
	302	°F	
ELECTRICAL PROPERTIES			
Relative Permittivity, 100Hz	9	-	IEC 60250
Relative Permittivity, 1MHz	6	-	IEC 60250
Dielectric Constant, 1 kHz	4.5 - 9.5	-	ASTM D150
Dissipation Factor, 100Hz	350	E-4	IEC 60250

Arkema France - A French "société anonyme", registered in the Nanterre (France) Trade and Companies Register under the number 319 632 790 SDC/11-2018
Source: automatically generated TDS from Material Database on 12-08-2024

KYNAR® 710


Dissipation Factor, 1MHz	2060	E-4	IEC 60250
Dissipation Factor, 100 kHz	0.01 - 0.21	-	ASTM D150
Volume Resistivity	2E12	Ohm* m	IEC 62631-3-1
Volume Resistivity, DC 68 °F, 65% R.H.	2E14	Ohm*c m	ASTM D257
Dielectric (Electric) Strength, 73°F	≥1.7	kV/mil	ASTM D149
OTHER PROPERTIES			
Water Absorption, 23°C, immersion, equilibrium	0.03	%	ISO 62
Water Absorption	0.01 - 0.03	%	ASTM D570
Density	1780	kg/m ³	ISO 1183
	1.78	g/cm ³	
Specific Gravity, 73 °F	1.77 - 1.79	-	ASTM D792
OPTICAL PROPERTIES			
Refractive Index @ sodium D line	1.42	-	ASTM D542

MAIN APPLICATIONS:


- corrosion protection in the chemical industry
- wire and cable
- coating (painting, co-extrusion)
- off shore

DIAGRAMS


VISCOSITY-SHEAR RATE

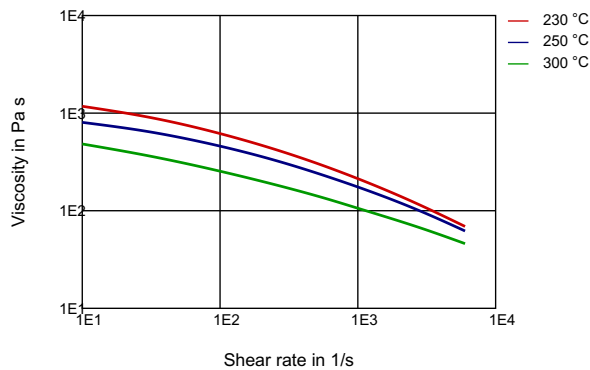


SHEARSTRESS-SHEAR RATE

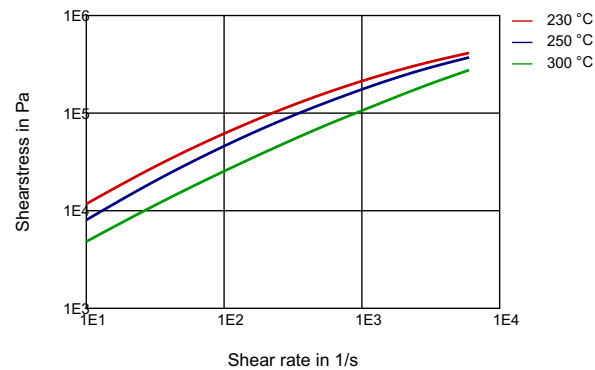


STRESS-STRAIN

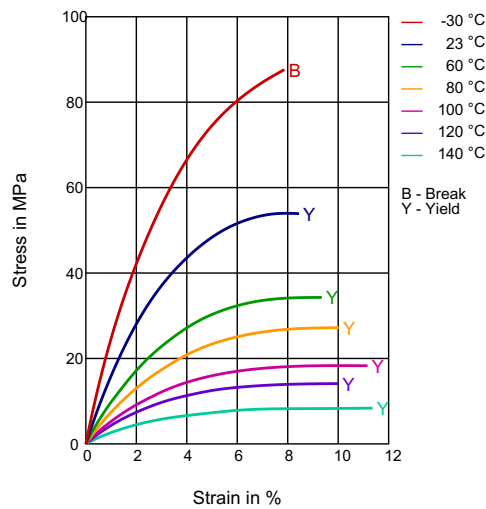

SECANT MODULUS-STRAIN

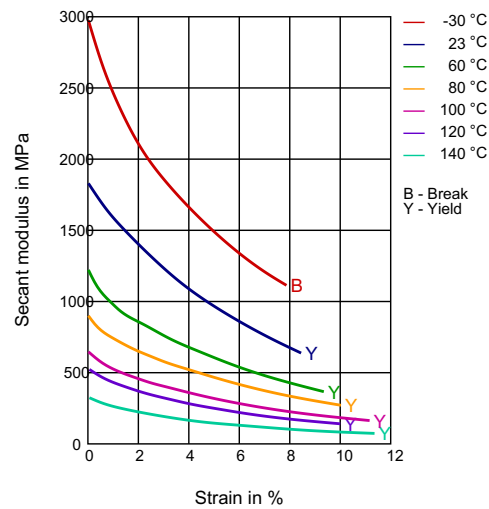

SPECIFIC VOLUME-TEMPERATURE (PVT)

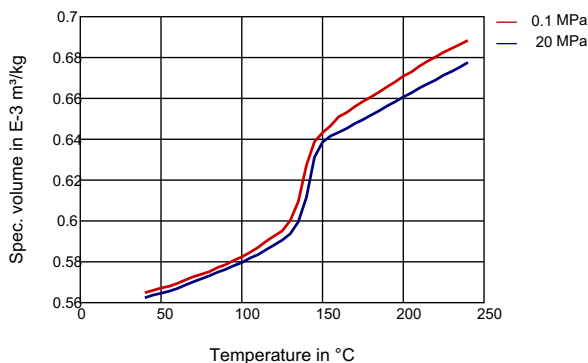

PROCESSING Injection Molding, Film Extrusion	Headquarters: Arkema France 420 rue d'Estienne d'Orves 92705 Colombes Cedex France T +33 (0)1 49 00 80 80 hpp.arkema.com Arkema Inc. – High Performance Polymers 900 First Avenue King of Prussia, PA 19406 Tel.: +1 610 205 7000 hpp.arkema.com
DELIVERY FORM Pellets	
SPECIAL CHARACTERISTICS Heat Stabilized, Light Stabilized	
REGIONAL AVAILABILITY North America, Europe, Asia Pacific, South and Central America, Near East/Africa	

The statements, technical information and recommendations contained herein are believed to be accurate as of the date hereof. Since the conditions and methods of use of the product and of the information referred to herein are beyond our control, ARKEMA expressly disclaims any and all liability as to any results obtained or arising from any use of the product or reliance on such information; NO WARRANTY OF FITNESS FOR ANY PARTICULAR PURPOSE, WARRANTY OF MERCHANTABILITY OR ANY OTHER WARRANTY, EXPRESSED OR IMPLIED, IS MADE CONCERNING THE GOODS DESCRIBED OR THE INFORMATION PROVIDED HEREIN. The information provided herein relates only to the specific product designated and may not be applicable when such product is used in combination with other materials or in any process. The user should thoroughly test any application before commercialization. Nothing contained herein constitutes a license to practice under any patent and it should not be construed as an inducement to infringe any patent and the user is advised to take appropriate steps to be sure that any proposed use of the product will not result in patent infringement.