

ORGALLOY® RS 6000 NAT

Orgalloy® RS 6000 NAT resin is a polyamide 6 alloy designed for injection molding. This natural grade offers an outstanding dimensional stability, chemical resistance to automotive fluids and is ideal for the realization of complex parts.

PROPERTIES	DRY / COND	UNIT	TEST STANDARD
RHEOLOGICAL PROPERTIES			
Melt Volume-Flow Rate	8 / *	cm ³ /10 min	ISO 1133
Temperature	235 / *	°C	-
	455 / *	°F	-
Load	2.16 / *	kg	-
	4.76 / *	lb	-
MECHANICAL PROPERTIES			
Tensile Modulus	2280 / 2030	MPa	ISO 527-1/-2
	331000 / 294000	psi	
Yield Stress	55 / 47	MPa	ISO 527-1/-2
	7980 / 6820	psi	
Yield Strain	4 / 6	%	ISO 527-1/-2
Nominal Strain at Break	14 / 21	%	ISO 527-1/-2
Stress at Break	44 / 40	MPa	ISO 527-1/-2
	6380 / 5800	psi	
Shore D Hardness, after 15 s	73 / *	-	ISO 868
Tensile Creep Modulus, 1h	* / 2030	MPa	ISO 899-1
	* / 294000	psi	
Tensile Creep Modulus, 1000h	* / 870	MPa	ISO 899-1
	* / 126000	psi	
Charpy Impact Strength, +23°C	61 / 67	kJ/m ²	ISO 179/1eU
	29 / 31.9	ftlb/in ²	
Charpy Impact Strength, -30°C	59 / 59	kJ/m ²	ISO 179/1eU
	28.1 / 28.1	ftlb/in ²	
Charpy Notched Impact Strength, +23°C	7 / 8	kJ/m ²	ISO 179/1eA
	3.33 / 3.81	ftlb/in ²	
Charpy Notched Impact Strength, -30°C	5 / 5	kJ/m ²	ISO 179/1eA
	2.38 / 2.38	ftlb/in ²	
THERMAL PROPERTIES			
Melting Temperature, 10°C/min	220 / *	°C	ISO 11357-1/-3
Temp. of Deflection Under Load, 1.80 MPa	71 / *	°C	ISO 75-1/-2
	160 / *	°F	

Arkema France - A French "société anonyme", registered in the Nanterre (France) Trade and Companies Register under the number 319 632 790 SDC/11-2018
Source: automatically generated TDS from Material Database on 12-08-2024

ORGALLOY[®]

RS 6000 NAT

Temp. of Deflection Under Load, 0.45 MPa	130 / *	°C	ISO 75-1/-2
	266 / *	°F	
Vicat Softening Temperature, 50°C/h 50N	150 / *	°C	ISO 306
	302 / *	°F	
Coeff. of Linear Thermal Expansion, parallel	93 / *	E-6/K	ISO 11359-1/-2
Coeff. of Linear Thermal Expansion, normal	133 / *	E-6/K	ISO 11359-1/-2
Burning Behav. at 1.5 mm Nominal Thickness	HB / *	class	IEC 60695-11-10
Thickness Tested	1.6 / *	mm	-
	0.0630 / *	in	
Burning Behav. at Thickness h	HB / *	class	IEC 60695-11-10
Thickness Tested	3.2 / *	mm	-
	0.1260 / *	in	
ELECTRICAL PROPERTIES			
Relative Permittivity, 100Hz	- / 3	-	IEC 60250
Relative Permittivity, 1MHz	- / 3	-	IEC 60250
Dissipation Factor, 100Hz	- / 620	E-4	IEC 60250
Dissipation Factor, 1MHz	- / 250	E-4	IEC 60250
Volume Resistivity	- / >1E13	Ohm* m	IEC 62631-3-1
Surface Resistivity	* / >1E15	Ohm	IEC 62631-3-2
Dielectric (Electric) Strength	38 / 38	kV/mm	IEC 60243-1
	965 / 965	kV/in	
Comparative Tracking Index	* / 600	-	IEC 60112
OTHER PROPERTIES			
Water Absorption, 23°C, immersion, equilibrium	6.6 / *	%	ISO 62
Humidity Absorption, 23°C, RH50%, equilibrium	2.2 / *	%	ISO 62
Density	1030 / 1030	kg/m ³	ISO 1183
	1.03 / 1.03	g/cm ³	

MAIN APPLICATIONS:

- Automotive tube clamping
- Ablation plate for miniature circuit breaker
- Electric connectors
- Sport parts

PACKAGING:

This grade is delivered dried in sealed packaging (25kg bags) ready to be processed.

SHELF LIFE:


Two years from the date of delivery. For any use above this limit, please refer to our technical services.

ORGALLOY[®]


RS 6000 NAT

DIAGRAMS


VISCOSITY-SHEAR RATE

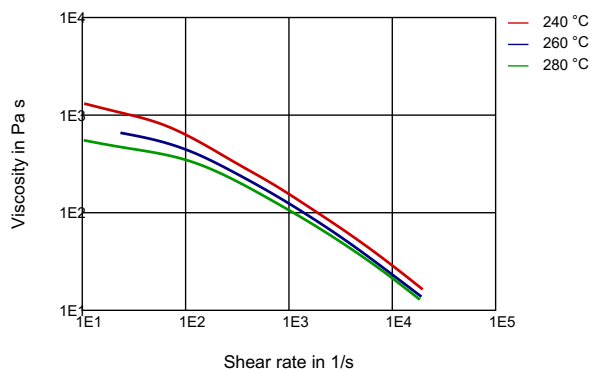


SHEARSTRESS-SHEAR RATE

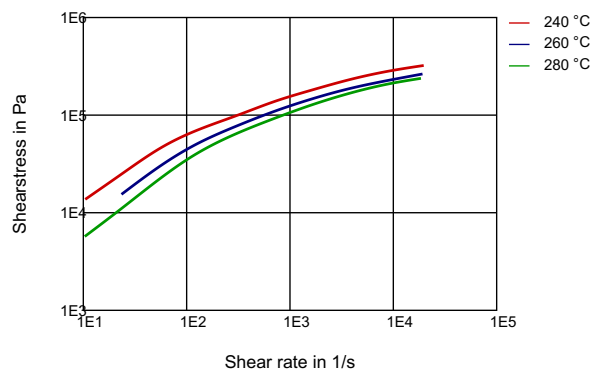

DYN. SHEAR MODULUS-TEMPERATURE

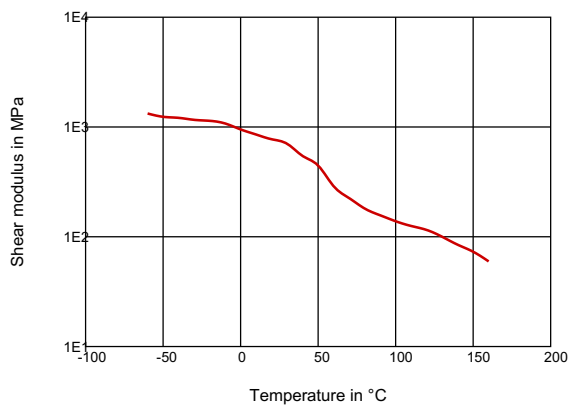


STRESS-STRAIN

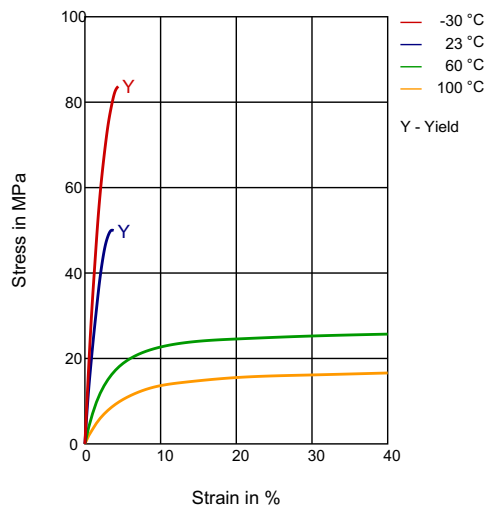


ORGALLOY[®] RS 6000 NAT


SECANT MODULUS-STRAIN

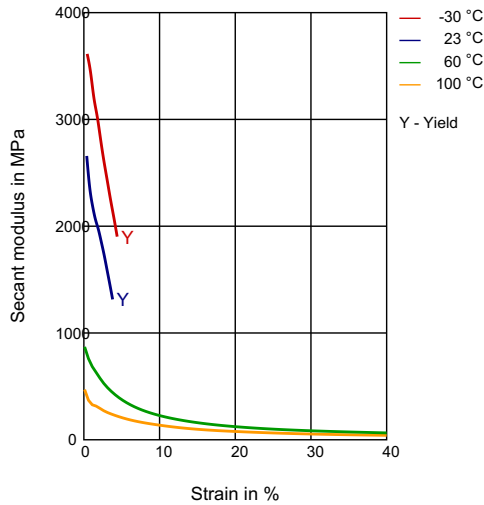


STRESS-STRAIN (ISOCHRONOUS) 73°F

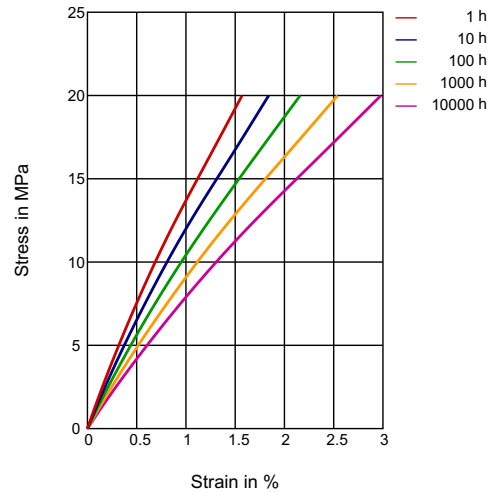

CREEP MODULUS-TIME 73°F

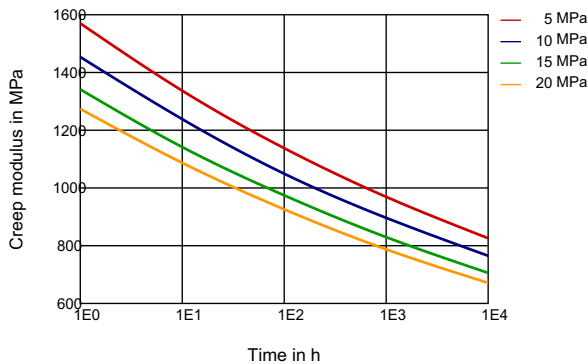

SPECIFIC VOLUME-TEMPERATURE (PVT)

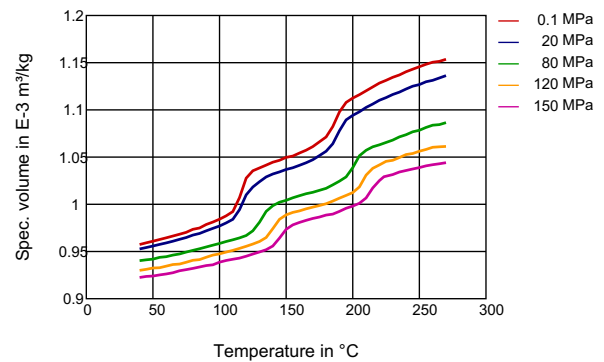

Processing conditions:

- Drying time (only necessary for bags opened for more than two hours): 4-8 hours at 80°C
- Injection temperature (min-recommended-max): 260-270-280°C
- Mould temperature (min-max): 20-60°C

ORGALLOY[®]

RS 6000 NAT

PROCESSING Injection Molding	Headquarters: Arkema France 420 rue d'Estienne d'Orves 92705 Colombes Cedex France T +33 (0)1 49 00 80 80 hpp.arkema.com Arkema Inc. – High Performance Polymers 900 First Avenue King of Prussia, PA 19406 Tel.: +1 610 205 7000 hpp.arkema.com
DELIVERY FORM Pellets	
SPECIAL CHARACTERISTICS Heat Stabilized, Light Stabilized	
REGIONAL AVAILABILITY North America, Europe, Asia Pacific, South and Central America, Near East/Africa	

The statements, technical information and recommendations contained herein are believed to be accurate as of the date hereof. Since the conditions and methods of use of the product and of the information referred to herein are beyond our control, ARKEMA expressly disclaims any and all liability as to any results obtained or arising from any use of the product or reliance on such information; NO WARRANTY OF FITNESS FOR ANY PARTICULAR PURPOSE, WARRANTY OF MERCHANTABILITY OR ANY OTHER WARRANTY, EXPRESSED OR IMPLIED, IS MADE CONCERNING THE GOODS DESCRIBED OR THE INFORMATION PROVIDED HEREIN. The information provided herein relates only to the specific product designated and may not be applicable when such product is used in combination with other materials or in any process. The user should thoroughly test any application before commercialization. Nothing contained herein constitutes a license to practice under any patent and it should not be construed as an inducement to infringe any patent and the user is advised to take appropriate steps to be sure that any proposed use of the product will not result in patent infringement.