

TECHNICAL DATA SHEET

PEBAX® RNEW® 35R53 SP 01

POLYETHER BLOCK AMIDE PELLET

PEBAX® RNEW® 35R53 SP 01 is a polyether block amide, a thermoplastic elastomer made of flexible polyether and rigid polyamide. It is partially produced from a renewable & sustainable source (castor oil). This natural SP grade is heat & UV stabilized. It is used in sport and consumer applications.

TYPE

PEBA

MAIN APPLICATIONS

- Footwear - outsole/components
- Industry - others (mach. equip.)
- Industry - distribution
- Extrusion - industrial
- Extrusion - consumer goods

DELIVERY FORM

- Pellets

TRANSFORMATION PROCESSES

- Extrusion - General
- Film Extrusion
- Injection Molding
- Tube Extrusion

ADDITIVES

- Heat Stabilized
- Light Stabilized

RHEOLOGICAL PROPERTIES

PROPERTIES	TYPICAL VALUE	UNIT	TEST STANDARD
Shrinkage, parallel (t+24h)	0.1	%	ISO 294-4
Shrinkage, normal (t+24h)	1	%	ISO 294-4

MECHANICAL PROPERTIES

PROPERTIES	TYPICAL VALUE	UNIT	TEST STANDARD
Flexural modulus, 23°C (73°F)	- / 40	MPa	ISO 178
Tensile modulus, 23°C (73°F)	- / 40	MPa	ISO 527-1/-2
Stress at 50% strain, 23°C (73°F)	- / 5	MPa	ISO 527-1/-2
Stress at break, 23°C (73°F)	- / 30	MPa	ISO 527-1/-2
Nominal strain at break, 23°C (73°F)	- / > 700	%	ISO 527-1/-2
Charpy unnotched impact strength, 23°C (73°F)	No break / No break		ISO 179 1eU
Charpy unnotched impact strength, -30°C (-22°F)	No break / No break		ISO 179 1eU
Charpy notched impact strength, 23°C (73°F)	No break / No break		ISO 179 1eA
Charpy notched impact strength, -30°C (-22°F)	No break / No break		ISO 179 1eA
Hardness, shore D, 15 s	- / 25		ISO 868

*DRY: Dry As Molded (DAM) if pellet / Dry if powder.
COND: Conditionned.

THERMAL PROPERTIES

PROPERTIES	TYPICAL VALUE	UNIT	TEST STANDARD
Melting temperature, 10°C/min	135	°C	ISO 11357-1/-3

PEBAX® RNEW® 35R53 SP 01

OTHER PROPERTIES

PROPERTIES	TYPICAL VALUE	UNIT	TEST STANDARD
Water absorption, at equilibrium at 23°C (73°F) / 50%RH	0.5	%	ISO 62
Bio-based carbon content, measured	30	%	ASTM D6866
Density, 23°C (73°F)	1.02	g/cm³	ISO 1183-1
Water absorption, at equilibrium at 23°C (73°F) / Immersion	1.3	%	ISO 62

PACKAGING

Available packaging:

- 25 kg / 55 lb bags

SHELF LIFE

Two years from the date of delivery, when stored properly (sealed bags, appropriate moisture, UV protection and temperature). For any use above this limit, please refer to our technical services.

PROCESSING CONDITIONS:

- Typical melt temperature (Min / Recommended / Max) - Injection Molding: 180°C / 210°C / 240°C (355°F / 410°F / 465°F)
- Typical mold temperature - Injection molding: 10-30°C (50-90°F)
- Drying time and temperature: 55-65°C (130-150°F) / 4-8 hours


SPECIAL CHARACTERISTICS

- Bio-based

REGIONAL AVAILABILITY

Asia Pacific, Europe, Latin America and the Caribbean, Middle East, Northern America

DIAGRAMS

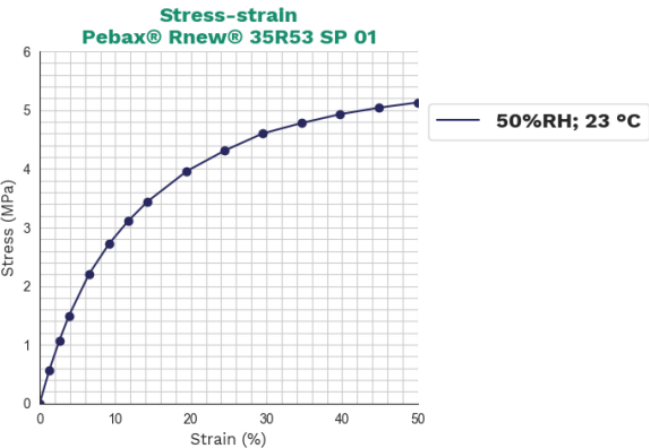

Headquarters: Arkema France
51, Esplanade du Général de Gaulle
92800 Puteaux – France
T +33 (0)1 49 00 80 80